

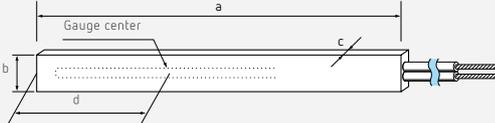


ε Series "PM"



Description

Operational temperature -20~+60°C

CONCRETE, MORTAR MATERIALS USE									
Gauge pattern	Type	Gauge (mm)		Backing				Resistance in Ω	
		Length	Width	W : width (Unit : mm)					
<p>This gauge has been exclusively designed for measuring interior strain in concrete or mortar under loading test.</p> <ul style="list-style-type: none"> ● Single-element (G.F. 2.1 approx.) 0.3mm² integral vinyl leadwire of 2m standard Total leadwire resistance per meter : 0.12Ω 2-wire system  <p>PML-60</p> <p>Each package contains 5 gauges.</p>			L : length	W : width (Unit : mm)					
	<p>*For long-term period use, Strain Transducer KM should be applied</p>								
	PML-60	-2L	60	1	125	13	5	40	120
	PML-120	-2LT*	120	1	180	13	5	65	120
									* 3-wire system(-2LT) is made to order.